

FLAMEFIGHTER® AEROSOL AUTO FIRE STICKER

Dual use for car and home environmental friendly
automatic fire extinguishing.



Automatic induction fire extinguishing

**Open flame or
temperature ≥ 170 degrees**

AUTOMATIC AEROSOL INDUCTION FIRE EXTINGUISHING

Multiple usage scenarios, fast 6-second fire extinguishing
in enclosed spaces



Refrigerator rear
shell space



Bank safe
deposit box



Electric switch box



Car hood



Communication
room cabinet



Archive cabinet

RAPID FIRE EXTINGUISHING IN INCLOSED SPACES

Both sides double spray structure, quickly
spreadsto every corner,
quickly extinguishes the fire



ACTIVE SENSING FOR 6 SECONDS TO AUTOMATICALLY EXTINGUISH FIRE

Automatic start of fire extinguishing for open flames or temperatures above 170 °C, extinguish initial fire sources



FLAMEFIGHTER® AUTOMATIC FIRE EXTINGUISHINGSTICKER

Protection space	0.4m ³
Fre extinguishing density	62.5g/m ³
Spraying time	≤10s
Start mode	Thermal start
Operating ambient	-50 °C ~ +110 °C
Size	80x80x37mm
Net weight	25g
Period of validity	5 years

PRODUCER: Wenzhou Flamefighter Safety Equipment Co., Ltd.

ADDRESS: No. 588, Binhai 12th Road, Wenzhou City, Zhejiang Province, China

GAS FIRE EXTINGUISHING IS CLEAN AND FREE OF RESIDUE

After spraying, there is no residual material and no secondary damage to the parts



After extinguishing
with aerosol product



No
Residue

After extinguishing
with dry powder products,



With
Powder
Residue

Resistant To Severe Cold

Low temperature resistance to -50~C



-50°C

High Temperature Resistance

High temperature resistance to 110 ° C



+110°C



FLAMEFIGHTER®
AUTOMATIC FIRE EXTINGUISHINGSTICKER

Protection space	0.4m ³
Fre extinguishing density	62.5g/m ³
Spraying time	≤10s
Start mode	Thermal start
Operating ambient	-50 C ~+110 C
Size	80x80x37mm
Net weight	25g
Period of validity	5 years

PRODUCER: Wenzhou Flamefighter Safety Equipment Co., Ltd.

ADDRESS: No. 588, Binshui 12th Road, Wenzhou City, Zhejiang Province, China

With Inspection And Testing Reports Safe And Reliable

STFWT202020140		检验检测结果 Testing Results		检验检测结果 Testing Results		注意事项	
序号 Serial	检验检测项目 Test Items	STFWT202020140		STFWT202020140		共 3 页 第 2 页 Page 2 of 3	
5	喷射性能	产品名称 Product Name	自动灭火贴	 <p>STFWT202020140</p>	<p>符合要求</p>	合格	<p>质量: 0.020kg 偏差: 1.3%</p>
		委托单位 Trust Unit	明光医药酒药设备有限				
		生产单位 Manufacturer	明光医药酒药设备有限				
		样品数量 Sample Quantity	10 套				
		检验检测类别 Test Category	委托送样检验				
样品状态 Samples Condition	符合检测要求	产品名称 Product Name	自动灭火贴	检验检测结果 Results	合格	合格	质量: 0.020kg 偏差: 1.3%
检验检测依据 Document and Decide Accordance	XF 499.1-2010 《气溶胶灭火器》	委托单位 Trust Unit	明光医药酒药设备有限	检验检测结果 Results	合格	合格	质量: 0.020kg 偏差: 1.3%
检验检测结论 Test Conclusion	样品合格	生产单位 Manufacturer	明光医药酒药设备有限	检验检测结果 Results	合格	合格	质量: 0.020kg 偏差: 1.3%
备注 Remarks	本次检测项目不在本中心检测范围，特此公告。本中心检测报告仅对本中心检测项目负责。	检验检测类别 Test Category	委托送样检验	检验检测结果 Results	合格	合格	质量: 0.020kg 偏差: 1.3%
批准 Approver	陈敏						

检验检测报告

TEST REPORT

江苏省特种设备安全保护产品质量监督检验中心
JIANGSU QUALITY SUPERVISION AND INSPECTION CENTER FOR SPECIAL SAFETY PROTECTION PRODUCTS

LONG TERM PROTECTION FOR 10 YEARS

Zero pressure storage;
Metal shell with powder coating;
Maintenance free

Metal shell with
powder coating

Durable and
corrosion-resistant




Chemical
Upgrade

long-term protection
fast fire extinguishing

COMES WITH 3M ADHESIVE LAYER

Easy to operate, stable and reliable

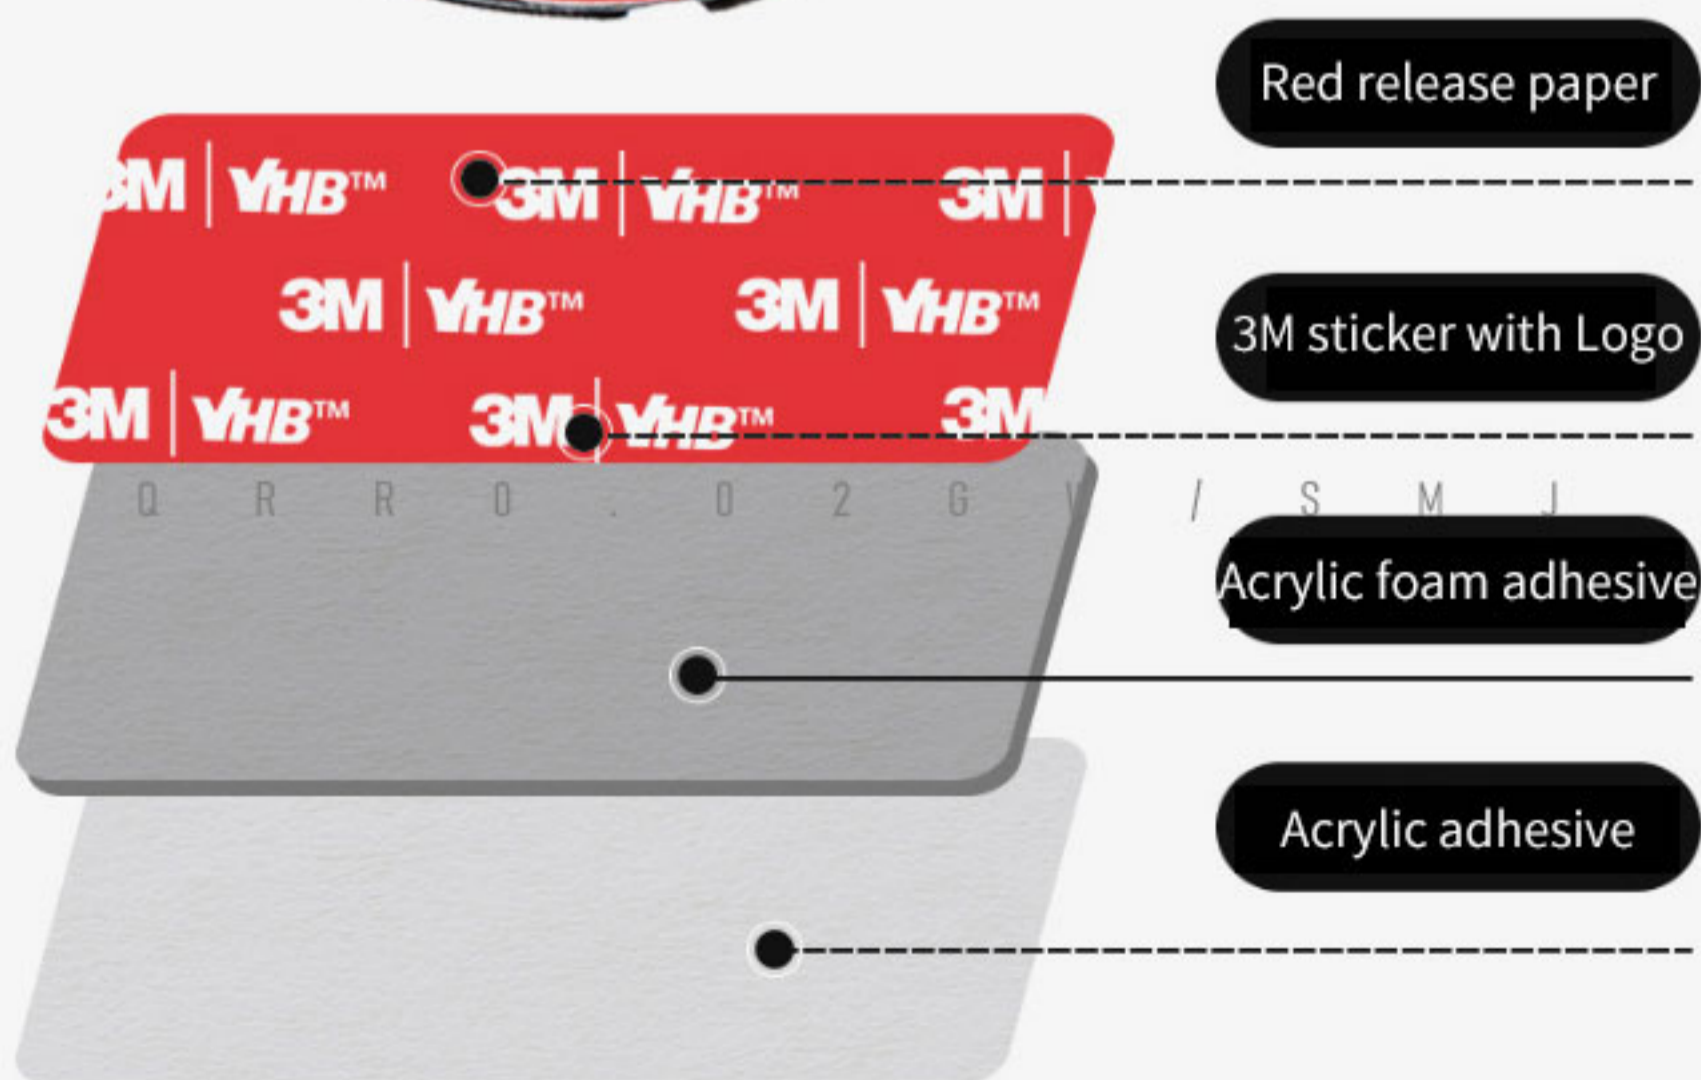

Red release paper


3M sticker with Logo

Acrylic foam adhesive

Acrylic adhesive

PRODUCT PARAMETER INFORMATION

Zero voltage storage with a validity period of 10 years

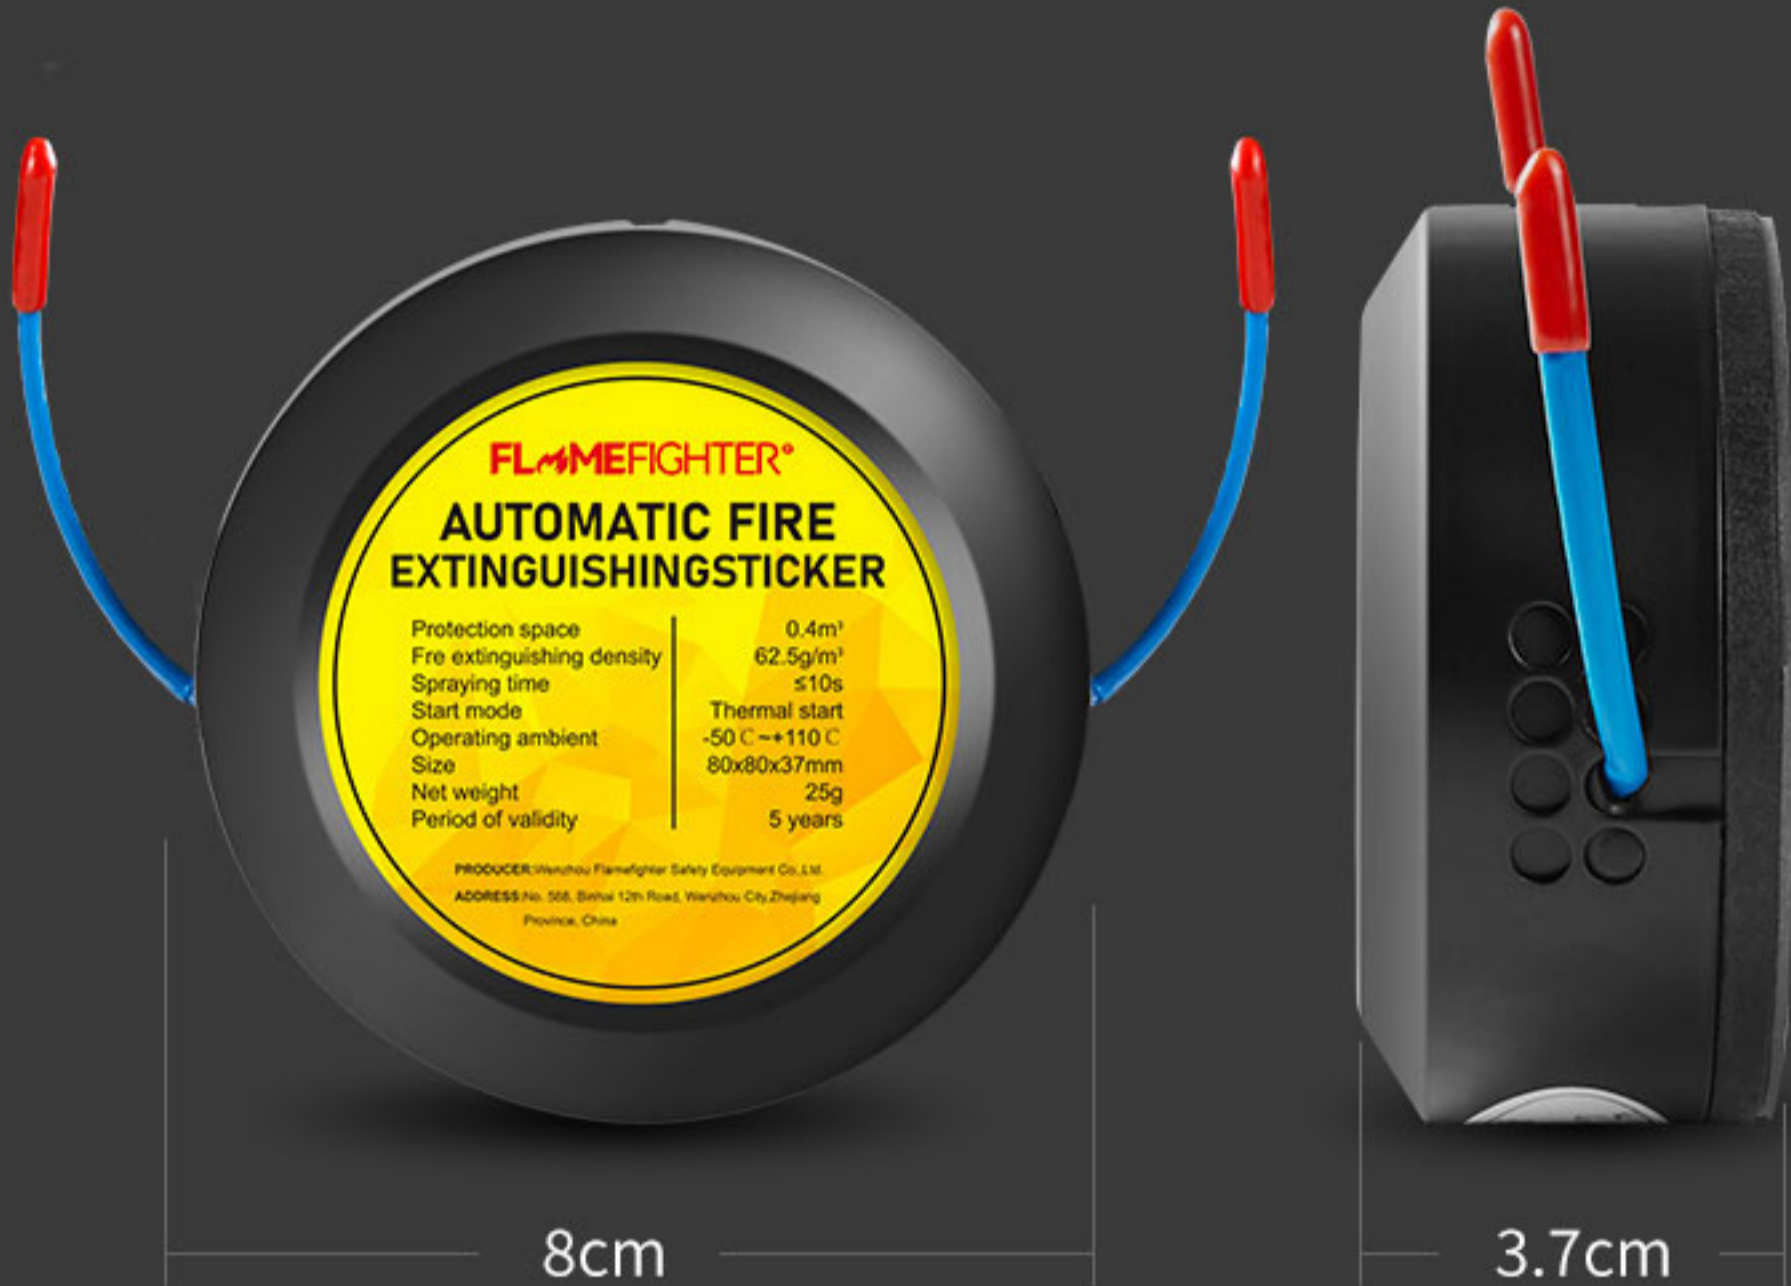

Model: QRR0.02GW/SMJ

Spray time: 10s

Temperature: -50 ° C ~ 110 ° C

Humidity: ≤95%

Oxidizing agent: Sr (NO₂) 60%/KNO₃, 20%

Fire extinguishing density: 50g/m³

Spray nozzle 5mm temperature: 200C

Surface temperature: <150 ° C

Validity period: 10 years

Executive standard: XF 499.1-2010

Precautions

1. Non professionals are not allowed to disassemble by themselves
2. After spraying, do not touch the shell before it cools down to prevent burns