

FLAMEFIGHTER

DOUBLE-SIDED THICKENED LIQUID SILICONE COATING

VEHICLE FIRE BLANKET

- FULL VEHICLE COVERAGE
- FLAME RETARDANT AND FIRE EXTINGUISHING
- RAPID FIRE CONTROL



FLAMEFIGHTER

WHY DO YOU NEED A VEHICLE FIRE BLANKET?

VEHICLE FIRES ARE COMMON, ESPECIALLY IN NEW ENERGY VEHICLES WHERE THE FIRE SPREADS VERY QUICKLY. CONVENTIONAL FIRE EXTINGUISHERS ARE OFTEN INEFFECTIVE IN SUCH SITUATIONS. A VEHICLE FIRE BLANKET CAN BE DIRECTLY PLACED OVER THE FIRE TO ISOLATE THE FLAMES, PREVENTING THE FIRE FROM SPREADING AND BECOMING DIFFICULT TO EXTINGUISH, OR EVEN CAUSING AN EXPLOSION.



HAVING THE RIGHT FIRE EXTINGUISHING PRODUCTS IS IMPORTANT.

SUITABLE FOR VARIOUS FIRE SITUATIONS.

APPLICABLE FOR: CARS, ELECTRIC VEHICLES, CARGO, EQUIPMENT,
AND OTHER FIRE SCENARIOS.



FLAMEFIGHTER

DOUBLE-SIDED THICKENED LIQUID SILICONE COATING

CAN COVER THE ENTIRE VEHICLE

6X8 METERS LARGE SIZE, THICK ENOUGH! LARGE ENOUGH!
PROVIDES EXCELLENT ISOLATION!



*Another size available: 3x4 meters
Suitable for electric scooters and bicycles

CERTIFIED BY THE NATIONAL FIRE SAFETY
QUALITY EQUIPMENT TESTING

FLAMEFIGHTER Ⅲ

AUTHORITATIVELY CERTIFIED

FIBERGLASS BASE FABRIC + LIQUID SILICONE COATING

检验结果汇总表

生产单位:温州市津瓯消防器材有限公司

No Zb202020239

型号规格: /

共02页 第02页

序号	检验项目	A(A1)	检验结果
1	不燃性		
	温升 ΔT , °C	≤ 30	4.2
	质量损失率 Δm , %	≤ 50	3.5
	持续燃烧时间 t_c , s	=0	0.0
2	总热值 PCS		
	匀质制品和非匀质制品的主要组分, MJ/kg	≤ 2.0	0.32
	非匀质制品的外部次要组分, MJ/kg	≤ 2.0	/
	非匀质制品的任一内部次要组分, MJ/m ²	≤ 1.4	/
	整体制品, MJ/kg	≤ 2.0	

以下空白。

国家消防装备质量监督检验中心



检验报告

No Zb202020239

受检单位名称 温州市津瓯消防器材有限公司

产品型号名称 玻璃纤维基布

检验类别 委托检验


国家消防装备质量监督检验中心

FLAMEFIGHTER


DOUBLE-SIDED THICKENED LIQUID SILICONE COATING

LIQUID SILICONE COATING

THICKENED TO ENHANCE FIRE EXTINGUISHING PERFORMANCE,
HEAT-RESISTANT, INSULATING, AND GENTLE ON HANDS

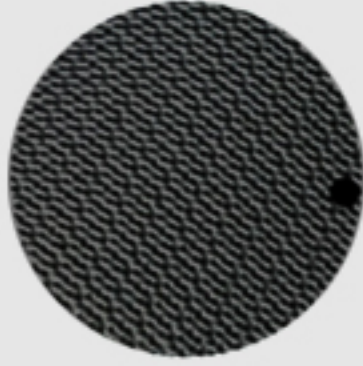

EXTERNAL SILICONE COATING PROCESS

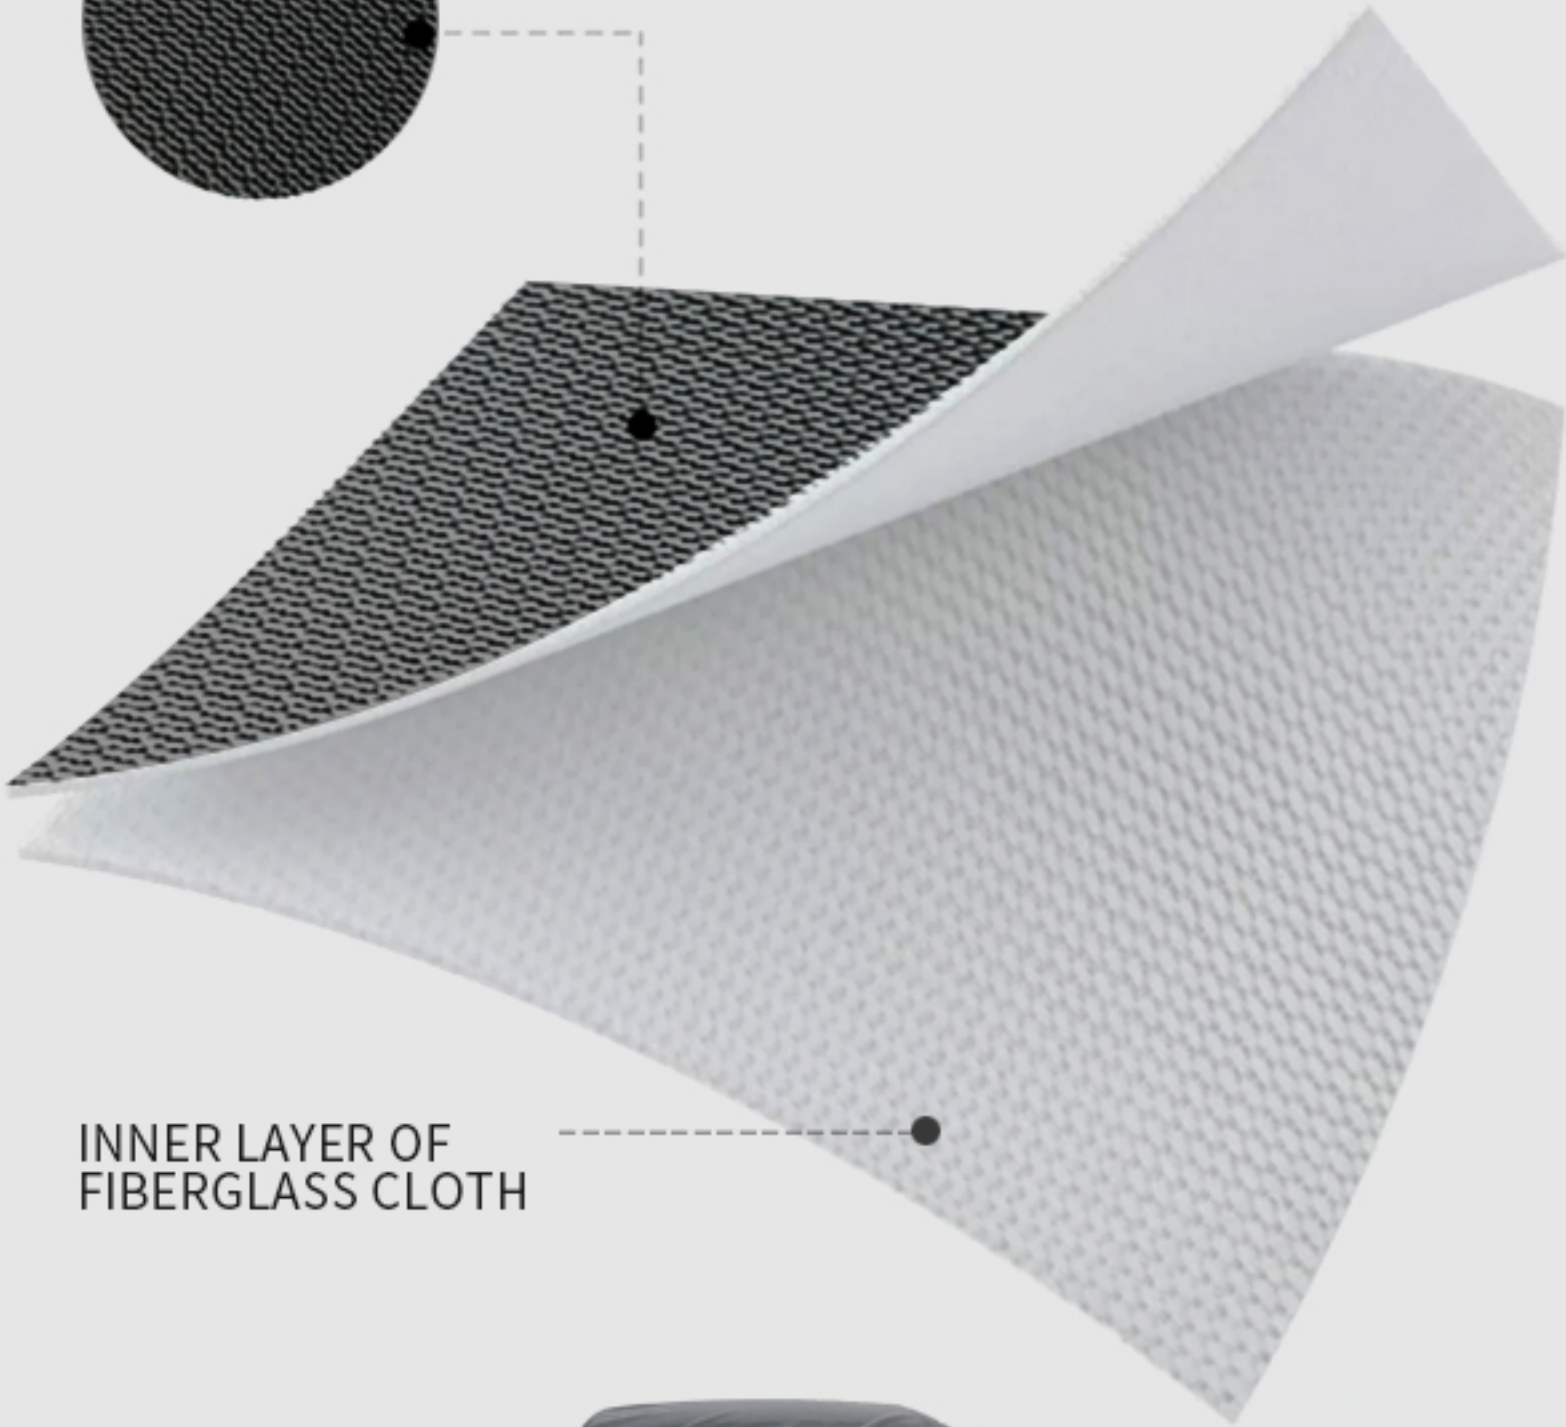

INNER LAYER OF
FIBERGLASS CLOTH



QUALITY IS SAFE AND RELIABLE

FLAMEFIGHTER Ⅲ

PRODUCT DETAILS

MULTIPLE DETAILED DISPLAYS, CRAFTED WITH CARE



SILICONE COATING
REINFORCED STITCHED
EDGES

GOOD MATERIALS MAKE GOOD
PRODUCTS, WITH A FINE
TEXTURE THAT IS GENTLE ON
THE HANDS

REINFORCED EDGES
DOUBLE-LAYER
EXTENDED STRAPS

THE HANDLE STRAP IS
EXTENDED TO 50 CM, WITH
DOUBLE-LAYER FOLDING
AND MULTIPLE LAYERS OF
REINFORCEMENT AT THE
EDGE TO ENSURE
DURABILITY.



HIGH-QUALITY BACKPACK
PULL HANDLE DESIGN

EASY TO STORE, EASY TO CARRY



FLAMEFIGHTER

DOUBLE-SIDED THICKENED LIQUID SILICONE COATING

PRODUCT INFORMATION

WIDELY APPLICABLE FOR: GAS STATIONS, PROPERTY MANAGEMENT, AUTO DEALERSHIPS, PARKING LOTS



PRODUCT BRAND:	FLAMEFIGHTER
PRODUCT NAME:	VEHICLE FIRE BLANKET
PRODUCT COLOR:	BLACK (RED BAG)
PRODUCT MATERIAL:	LIQUID SILICONE COATING + FIBERGLASS CLOTH
PRODUCT SIZE:	3x4 METERS / 6x8 METERS
PRODUCT WEIGHT:	3x4 METERS (APPROX. 6 KG) / 6x8 METERS (APPROX. 27 KG)
PRODUCT THICKNESS:	0.45 MM
PRODUCT FEATURES:	FIREPROOF, HIGH-TEMPERATURE RESISTANT, FLAME-RETARDANT, HEAT-INSULATING

PRODUCT USAGE INSTRUCTIONS

APPLICABLE FOR: CARS, ELECTRIC VEHICLES, CARGO, EQUIPMENT, AND OTHER FIRE SCENARIOS



1. IN THE EVENT OF A CAR FIRE.



2. FIRST, CALL THE EMERGENCY FIRE NUMBER 119.



3. TWO PEOPLE SHOULD UNFOLD THE FIRE BLANKET LENGTHWISE.



4. ENSURE THE FIRE BLANKET COVERS THE FIRE COMPLETELY AND TIGHTLY TO PREVENT OXYGEN FROM ENTERING, ACHIEVING OXYGEN ISOLATION FOR EXTINGUISHING THE FIRE.



5. WAIT AT LEAST 30 MINUTES FOR THE CAR TO COOL DOWN COMPLETELY, ENSURING THERE IS NO RISK OF RE-IGNITION.



6. REMOVE THE FIRE BLANKET FROM THE CAR AND MOVE AWAY FROM THE VEHICLE.

FLAMEFIGHTER

REAL-WORLD DISPLAY

WIDELY APPLICABLE FOR: GAS STATIONS, PROPERTY MANAGEMENT,
AUTO DEALERSHIPS, PARKING LOTS

